


## Selection Guide

### Complete Unit


#### Standard Enclosure

Dimension			Single Door Enclosure	Double Door Enclosure
HxD (mm)	Width (mm)		Model	Model
	Single door	Double door		
1800 X 400	600	1000	BM186-4	BM1810-4-D
	800	1200	BM188-4	BM1812-4-D
	1000	-	BM1810-4	-
1800 X 600	400	800	BM184-6	BM188-6-D
	600	1200	BM186-6	BM1812-6-D
	800	-	BM188-6	-
2000 X 400	600	1200	BM206-4	BM2012-4-D
	800	-	BM208-4	-
2000 X 600	400	1000	BM204-6	BM2010-6-D
	600	1200	BM206-6	BM2012-6-D
	800	-	BM208-6	-
2000 X 800	600	1200	BM206-8	BM2012-8-D
	800	-	BM208-8	-
2200 X 600	600	1200	BM226-6	BM2212-6-D
	800	-	BM228-6	-

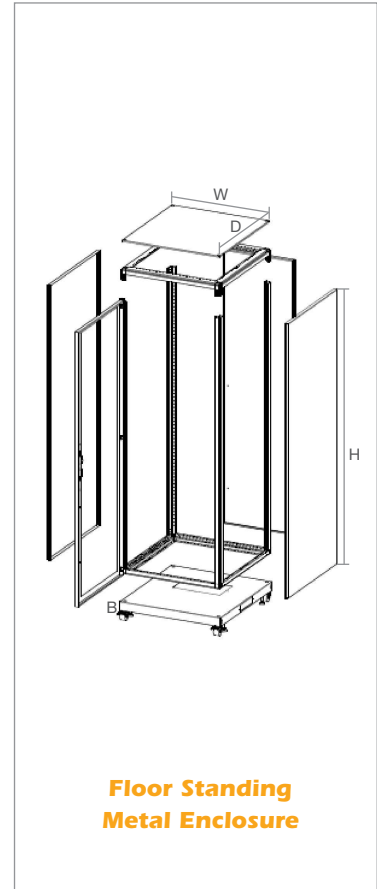

### 19" Rack

U Height	600x600mm (WxD)	600x800mm (WxD)	800x600mm (WxD)	800x800mm (WxD)	Effective height, b(mm)	Overall height, a(mm)
12U	RU12AA	RU12AB	-	-	533.40	722.00
17U	RU17AA	RU17AB	-	-	755.65	934.00
22U	RU22AA	RU22AB	-	-	977.90	1166.00
27U	RU27AA	RU27AB	-	-	1200.15	1389.00
32U	RU32AA	RU32AB	-	-	1422.40	1611.00
37U	RU37AA	RU37AB	-	-	1644.65	1833.00
39U	RU39AA	RU39AB	RU39BA	RU39BB	1733.55	1922.00
42U	RU42AA	RU42AB	RU42BA	RU42BB	1866.90	2055.00
45U	RU45AA	RU45AB	RU45BA	RU45BB	2000.25	2189.00

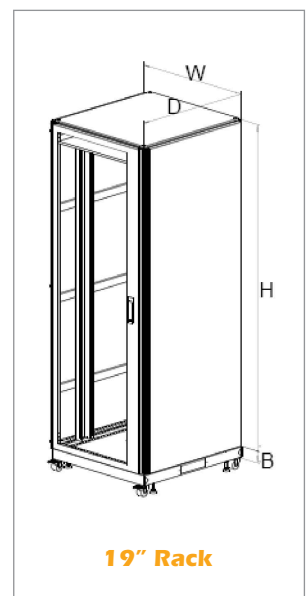

## Selection Guide

### Knock Down Unit

Type	Model	Description
<b>BM enclosure system</b>		
19" Rack Frame	19RF	12U to 45U
Fixed Rack Frame	FRF	600mm & 800mm
Swing Rack Frame	SRF	600mm & 800mm
Sliding Tray	ST	Height : 1U to 3U
Compartments Plate	CP	Width : 600mm (shelf - 471mm) : 800mm (shelf - 771mm) Depth : 400mm, 500mm, 600mm & 700mm
Side Mounting Bar/Profile	SMB	Depth : 400mm, 500mm, 600mm & 800mm
<b>Accessories</b>		
Side panel	SPR SPF SPV	Removable solid side panel Fixed solid side panel Improved heat dissipation bottom-end ventilated
Plinth	PL100 PL200	Height 100 mm Height 200mm
Front door options	FGD FMDP  FMDF	Front glass door – standard Front metal door (plain) – Closed visibility, economical Front metal door (Perforated) – Improved heat circulation
Rear door options	RMDP	Rear metal door – standard
Tray options  note - 500mm/14" tray for 600mmdepth cabinet - 600mm/18" tray for 800mm depth cabinet	TFXXN50 TFXXN60 TFXXV50 TFXXV60 TX5014N  TX6018N  TX5014V  TX6018V	Equipment tray 500mm Equipment tray 600mm Vented equipment tray 500mm Vented equipment tray 600mm Equipment sliding tray 14" (full extension with positive lock) Equipment sliding tray 18" (full extension with positive lock) Vented equipment sliding tray 14" (full extension with positive lock) Vented equipment sliding tray 18" (full extension with positive lock)
Bottom panel options	CW AF	Castor wheel – standard Adjustable jack feet – standard
Power distribution panel options	PDP4 PDP8 PDP12	4 ways panel - standard 8 ways panel – added equipment 12 ways panel – max equipment
Fan system	FN120 FN150 FL120 FL150	120 mm fan 150 mm fan 120 mm filter 150 mm filter
Fan base	FB	
Lock options	CL SW	Cam lock – standard (side door) Swing handle – standard (front & rear door)

## Selection Guide

### Knock Down Unit

Type	Model	Description
<b>Accessories</b>		
Mounting angle options	MA12 MA17 MA22 MA27 MA32 MA37 MA39 MA42 MA45	Cage nuts and screws will be needed in order to mount equipment to Universal Mounting Rails
Cable management options	FPXC1U FPXC2U FPXH1U FPXH2U	Cable tray with cover for horizontal cable routing 1U, 2U Open cable tray for horizontal cable routing without cover 1U, 2U
Mounting hardware options	MH CN MH S	M6 tapped cage nuts & screws
Eye bolts options	EB	Thread M12 For crane transportation of enclosure
Fill panel options	CG  BUK FPXAN1U  FPXAN2U  FPXGN1U  FPXGN2U  FPXAV1U  FPXAV2U  FPXGV1U  FPXGV2U  EB	Cage nut assemble – M6 screw, cage, nut & cup washer, 50 sets Bay-up kit – for rack to rack connection Fill-panel 1U (anodized aluminium) – to cover empty mounting space Fill-panel 2U (anodized aluminium) – to cover empty mounting space Fill-panel 1U (electro galvanized sheet) – to cover empty mounting space Fill-panel 2U (electro galvanized sheet) – to cover empty mounting space Vented fill-panel 1U (anodized aluminium) – to cover empty mounting space & improved heat dissipation Vented fill-panel 2U (anodized aluminium) – to cover empty mounting space & improved heat dissipation Vented fill-panel 1U (electro galvanized sheet) – to cover empty mounting space & improved heat dissipation Vented fill-panel 2U (electro galvanized sheet) – to cover empty mounting space & improved heat dissipation Earth bar – to prevent leakages
<b>Optional Accessories</b>		
Leveling feet	LF	M12
Castors	CAS	M12
Lock Systems	LS	
Wiring Plan Pockets	WPP	