



Order Form

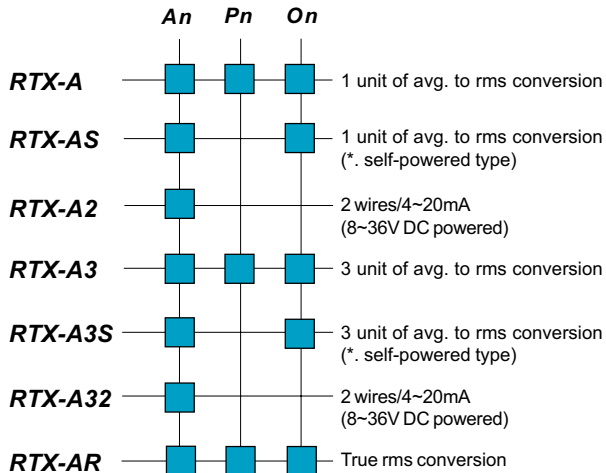

Example: RTX-A-A2-P1-O3

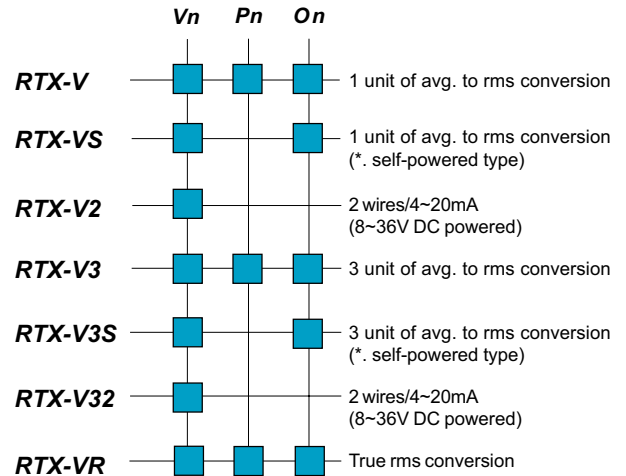

Example: RTX-V-V1-P1-O3

Input & Output Parameters

Vn: Voltage input	Vn rating range	V1 150V AC 0~150V AC	V2 300V AC 0~300V AC	V3 500V AC 0~500V AC	V4 110V AC 0~110V AC	V5 440V AC 0~440V AC	On: Output		
							O1 0~1mA	O2 0~20mA	O3 4~20mA
An: Current input	An rating range	A1 1A 0~1A	A2 5A 0~5A					O5 0~10mA	O6 0~1V
							O7 0~5V	O8 0~10V	O9 2~10V
Pn: Auxiliary power input	Pn rating	P1 120V AC	P2 240V AC	P3 415V AC	P4 30V DC	P5 110V DC	O10 1~5V		

- Note:**
1. For self-powered type zero based outputs only
 2. RTX-AR & RTX-VR TRMS conversion with ability for a distortion wave form measurement