


Order Form

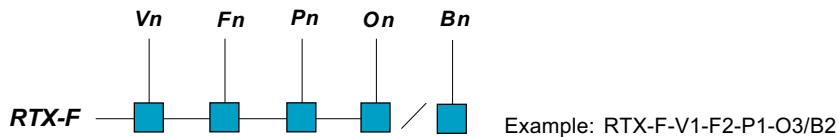

Input & Output Parameters

Vn: Voltage input	Vn range	V1 60~300V AC	V2 300~500V AC		On: Output		
					O1 0~1mA	O2 0~20mA	O3 4~20mA
Fn: Frequency	Fn rating	F1 50 Hz	F2 60 Hz			O5 0~10mA	O6 0~1V
					O7 0~5V	O8 0~10V	O9 2~10V
Bn: Calibration band	Bn range	B1 ± 0.5 Hz	B2 ± 1 Hz	B3 ± 2 Hz	O10 1~5V		
		B4 ± 5 Hz	B5 ± 10 Hz				
Pn: Auxiliary power input	Pn rating	P1 120 V AC	P2 240 V AC	P3 415V AC	P4 30V DC	P5 110V DC	

Note: For internal powered type zero based outputs and Vn operation range 85%~115%